


YUEQING QIXING CO., LIMITED

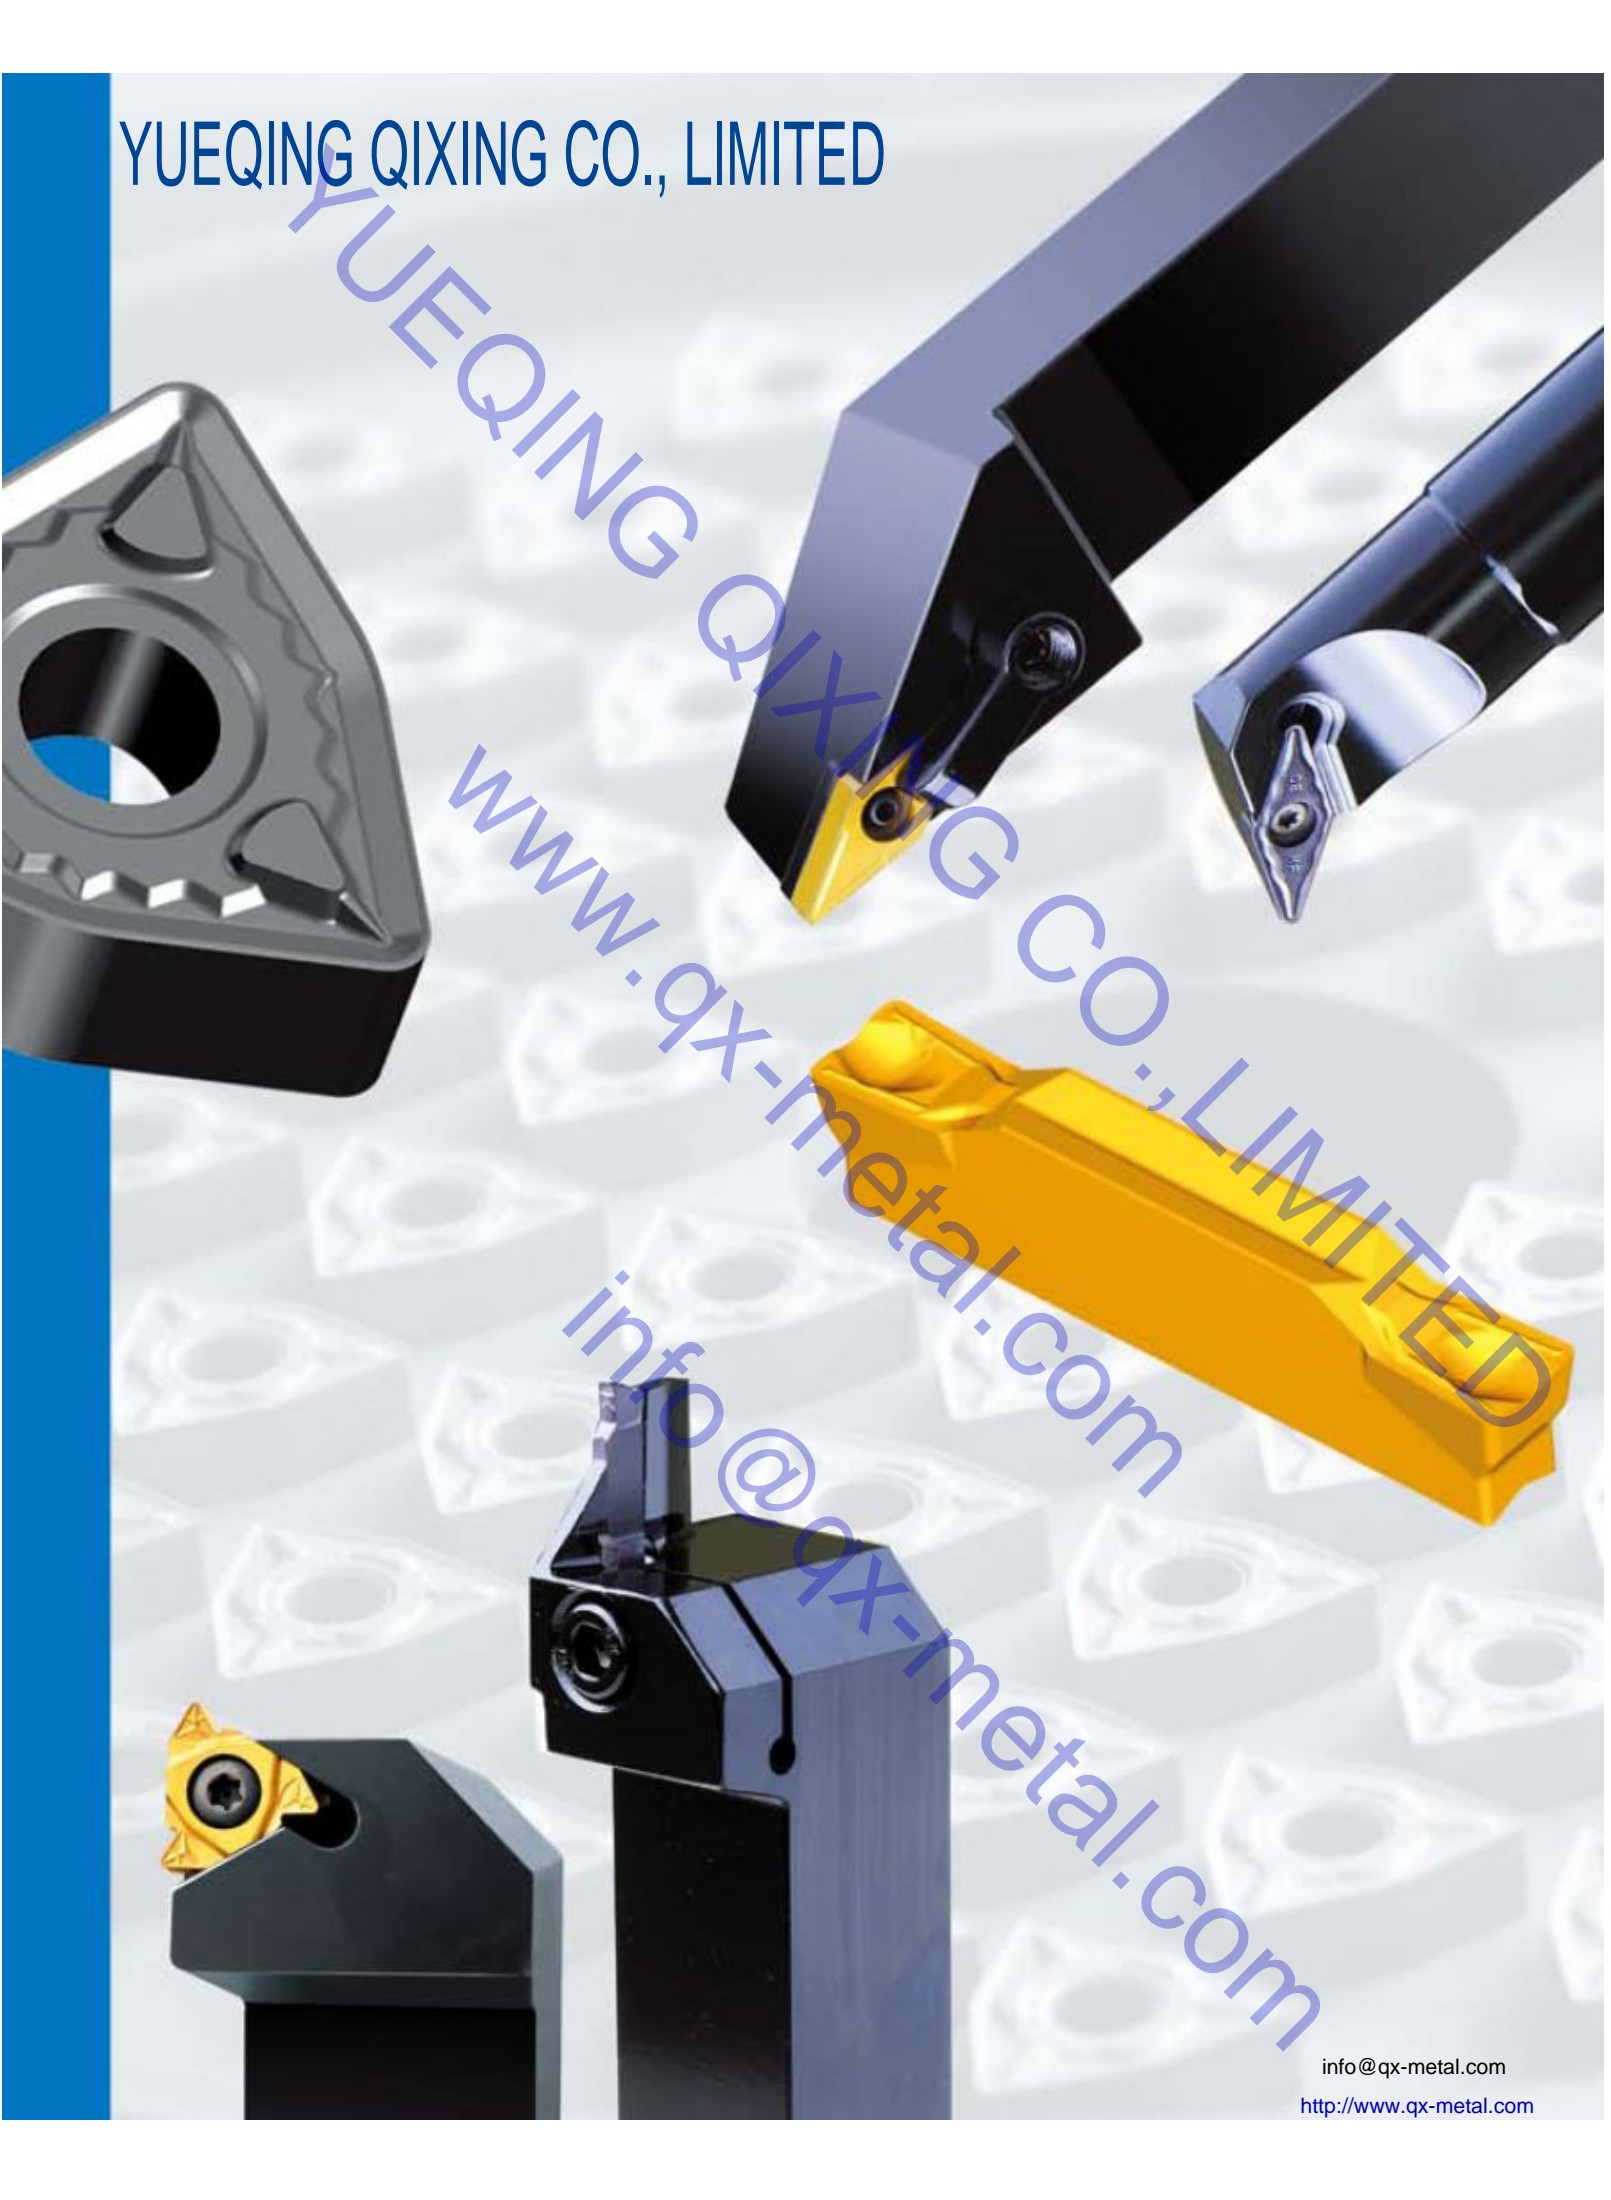

YUEQING QIXING CO., LIMITED
www.qx-metal.com
info@qx-metal.com

info@qx-metal.com
<http://www.qx-metal.com>

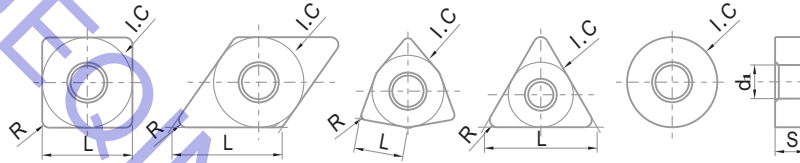


Illustration	Type		Dimension (mm)						Recommended grade		Recommended Holder
	(ISO)	(inch)	L	ΦI.C	S	Φd ₁	R	ZPC101			
	CNMG	120404-CX	431-CX	12.9	12.7	4.76	5.16	0.4	★		MCLNR/L
		120408-CX	432-CX					0.8	★		PCLNR/L
		120412-CX	433-CX					1.2	★		DCLNR/L
	CNMG	120408-CQ	432-CQ	12.9	12.7	4.76	5.16	0.8	★		MCBNR/L
		120412-CQ	433-CQ					1.2	★		PCBNR/L
		120416-CQ	434-CQ					1.6	★		MCKNR/L
		160608-CQ	542-CQ	16.1	15.875	6.35	6.35	0.8	★		MCFNR/L
		160612-CQ	543-CQ					1.2	★		MCGNR/L
		160616-CQ	544-CQ					1.6	★		MCSNR/L
		190612-CQ	643-CQ	19.3	19.05	6.35	7.94	1.2	★		MCMNN
		190616-CQ	644-CQ					1.6	★		****-MCKNR/L
	CNMA	120404	431	12.9	12.7	4.76	5.16	0.4	★		****-MCWNR/L
		120408	432					0.8	★		****-MCLNR/L
		120412	433					1.2	★		
		120416	434	16.1	15.875	6.35	6.35	1.6	★		
		120424	436					2.4	★		
		160612	543					1.2	★		
		160616	544	19.3	19.05	6.35	7.94	1.6	★		
		190608	642					0.8	★		
		190612	643					1.2	★		
		190616	644	19.3	19.05	6.35	7.94	1.2	★		
		190624	646					1.2	★		
	DNMG	110404-CX	331-CX	11.6	9.525	4.76	3.81	0.4	★		MDJNR/L
		110408-CX	332-CX					0.8	★		PDJNR/L
		150404-CX	431-CX					0.4	★		DDJNR/L
		150408-CX	432-CX	15.5	12.7	4.76	5.16	0.8	★		MDPNN
		150412-CX	433-CX					1.2	★		MDQNR/L
		150604-CX	441-CX					0.4	★		****-MDQNR/L
		150608-CX	442-CX	15.5	12.7	6.35	5.16	0.8	★		****-MDUNR/L
		150612-CX	443-CX					1.2	★		****-MDZNR/L
	DNMG	110408-CQ	332-CQ	11.6	9.525	4.76	3.81	0.8	★		
		110412-CQ	333-CQ					1.2	★		
		150408-CQ	432-CQ					0.8	★		
		150412-CQ	433-CQ	15.5	12.7	4.76	5.16	1.2	★		
		150608-CQ	442-CQ					0.8	★		
		150612-CQ	443-CQ					1.2	★		
	DNMA	150404	431	15.5	12.7	4.76	5.16	0.4	★		
		150408	432					0.8	★		
		150412	433					1.2	★		
		150608	441	15.5	12.7	6.35	5.16	0.4	★		
		150612	443					1.2	★		
		150616	443					1.2	★		

★ the 1st choice ☆ the 2nd choice

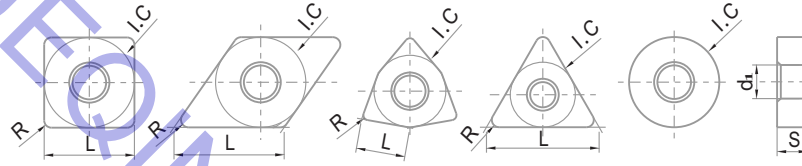


Illustration	Type		Dimension (mm)						Recommended grade		Recommended Holder				
	(ISO)	(inch)	L	ΦI.C	S	Φd ₁	R	ZPC101							
	SNMG	090308-CX	322-CX	9.525	9.525	3.18	3.81	0.8	★						
		120408-CX	432-CX	12.7	12.7	4.76	5.16	0.8	★						
		120412-CX	433-CX					1.2	★						
		120416-CX	434-CX	15.875	15.875	6.35	6.35	1.6	★						
		150612-CX	543-CX					1.2	★						
		150616-CX	544-CX	19.05	19.05	6.35	7.94	1.6	★						
		190612-CX	643-CX					1.2	★						
		190616-CX	644-CX	1.6	★										
	SNMA	090308	322	9.525	9.525	3.18	3.81	0.8	★		PSBNR/L				
		120408	432	12.7	12.7	4.76	5.16	0.8	★		MSDNN				
		120412	433					1.2	★		PSDNN				
		120416	434	15.875	15.875	6.35	6.35	1.6	★		MSKNR/L				
		150612	543					1.2	★		PSKNR/L				
		150616	544	19.05	19.05	6.35	7.94	1.6	★		MSSNR/L				
		190608	642					0.8	★		PSSNR/L				
		190612	643	19.05	19.05	6.35	7.94	1.2	★		DSSSN/L				
		190616	644					1.6	★		SSBCR/L				
		250724	856	25.4	25.4	7.94	9.12	2.4	★		****-MSKNR/L				
			TNMG	160404-CX	331-CX	16.5	9.525	4.76	3.81	0.4	★		MTQNR/L		
160408-CX	332-CX			0.8	★						MTBNR/L				
	TNMG	160408-CQ	332-CQ	16.5	9.525	4.76	3.81	0.8	★		MTENN				
		160412-CQ	333-CQ					1.2	★		MTJNR/L				
		220408-CQ	432-CQ	22	12.7	4.76	5.16	0.8	★		MTFNR/L				
		220412-CQ	433-CQ					1.2	★		MTGNR/L				
		220416-CQ	434-CQ					1.6	★		MTANR/L				
	TNMA	160404	331	16.5	9.525	4.76	3.81	0.4	★		MTTNR/L				
		160408	332					0.8	★		MTRNR/L				
		160412	333					1.2	★		****-MTFNR/L				
		160416	334					1.6	★		****-MTQNR/L				
		220404	431	22	12.7	4.76	5.16	0.4	★		****-MTJNR/L				
		220408	432					0.8	★		****-MTUNR/L				
		220412	433					1.2	★		****-MTWNR/L				
		220416	434					1.6	★						
		270616	544					27.5	15.875	6.35	6.35	1.6	★		
	VNMG	160408-CQ	332-CQ	16.5	9.525	4.76	3.81	0.8	★		MVJNR/L				
		160412-CQ	333-CQ					1.2	★		MVQNR/L				
											MVVNR/L				
											MVVNN				
											****-MVQNR/L				
											****-MVUNR/L				
											****-MVWNR/L				
									****-MVXNR/L						
									****-MVVNR/L						

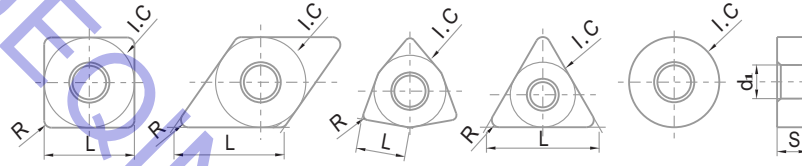





Illustration	Type		Dimension (mm)					Recommended grade		刀杆推荐
	(ISO)	(inch)	L	ΦI.C	S	Φd ₁	R	ZPC101		
	WNMG	060404-CX	331-CX	6.5	9.525	4.76	3.81	0.4	★	MVLNR/L WVLR/L PVLNR/L DVLNR/L ****-MVLNR/L
		060408-CX	332-CX					0.8	★	
		080404-CX	431-CX	8.7	12.7	4.76	5.16	0.4	★	
		080408-CX	432-CX					0.8	★	
		080412-CX	433-CX					1.2	★	
	WNMG	060408-CQ	332-CQ	6.5	9.525	4.76	3.81	0.8	★	
		060412-CQ	333-CQ					1.2	★	
		080408-CQ	432-CQ	8.7	12.7	4.76	5.16	0.8	★	
		080412-CQ	433-CQ					1.2	★	
		080416-CQ	434-CQ					1.6	★	
	WNMA	060408	332	6.5	9.525	4.76	3.81	0.8	★	
		060412	333					1.2	★	
		080408	432	8.68	12.7	4.76	5.16	0.8	★	
		080412	433					1.2	★	
		080416	434					1.6	★	

★ the 1st choice ☆ the 2nd choice

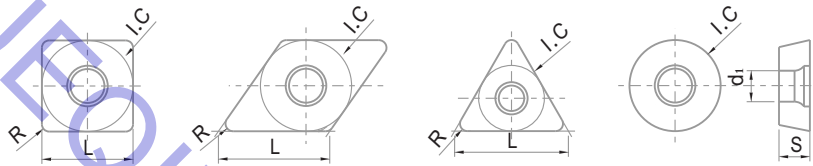


Illustration	Type		Dimension (mm)						Recommended grade		刀杆推荐	
	(ISO)	(inch)	L	ΦI.C	S	Φd ₁	R	ZPC101				
	CCMT	060204-CX	2(1.5)1-CX	6.4	6.35	2.38	2.8	0.4	★		SCACR/L	
		09T304-CX	3(2.5)1-CX	9.7	9.525	3.97	4.4	0.4	★		SCFCR/L	
	CCMT	060204-CQ	2(1.5)1-CQ	6.4	6.35	2.38	2.8	0.4	★		SCMCN	
		060208-CQ	2(1.5)2-CQ					0.8	★		SCLCR/L	
		09T304-CQ	3(2.5)1-CQ	9.7	9.525	3.97	4.4	0.4	★		****-SCKCR/L	
		09T308-CQ	3(2.5)2-CQ					0.8	★		****-SCLCR/L	
	CCMW	060204	2(1.5)1	6.4	6.35	2.38	2.8	0.4	★		****-SCZCR/L	
		09T304	3(2.5)1	9.7	9.525	3.97	4.4	0.4	★			
	DCMT	070204-CX	2(1.5)1-CX	7.75	6.35	2.38	2.8	0.4	★		SDJCR/L	
		11T304-CX	3(2.5)1-CX	11.6	9.525	3.97	4.4	0.4	★		SDFCR/L	
	DCMT	070204-CQ	2(1.5)1-CQ	7.75	6.35	2.38	2.8	0.4	★		SDACR/L	
		070208-CQ	2(1.5)2-CQ					0.8	★		SDNCN	
		11T304-CQ	3(2.5)1-CQ	11.6	9.525	3.97	4.4	0.4	★		SDQCR/L	
		11T308-CQ	3(2.5)2-CQ					0.8	★		****-SDWCR/L	
	DCMW	11T304	3(2.5)1	11.6	9.525	3.97	4.4	0.4	★		****-SDQCR/L	
								0.4	★		****-SDLCR/L	
	SCMT	09T304-CX	3(2.5)1-CX	9.525	9.525	3.97	4.4	0.4	★		SSBCR/L	
		09T308-CX	3(2.5)2-CX					0.8	★		SSDCN	
	SCMT	09T304-CQ	3(2.5)1-CQ	9.525	9.525	3.97	4.4	0.4	★		SSKCR/L	
		09T308-CQ	3(2.5)2-CQ					0.8	★		SSSCR/L	
	SCMW	09T304	3(2.5)1	9.525	9.525	3.97	4.4	0.4	★		****-SSKCR/L	
		09T308	3(2.5)2					0.8	★		****-SSSCR/L	
		120408	432	12.7	12.7	4.76	5.5	0.8	★			
									★			
	TCMT	090204-CX	1.8(1.5)1-CX	9.6	5.56	2.38	2.5	0.4	★		STFCR/L	
		110304-CX	221-CX	11	6.35	3.18	2.8	0.4	★		STGCR/L	
		16T304-CX	3(2.5)1-CX	16.5	9.525	3.97	4.4	0.4	★		STWCR/L	
	TCMT	090204-CQ	1.8(1.5)1-CQ	9.6	5.56	2.38	2.5	0.4	★		****-STFCR/L	
		090208-CQ	1.8(1.5)2-CQ					0.8	★		****-STUCR/L	
		110304-CQ	221-CQ	11	6.35	3.18	2.8	0.4	★		****-STWCR/L	
		110308-CQ	222-CQ					0.8	★			
		16T304-CQ	3(2.5)1-CQ	16.5	9.525	3.97	4.4	0.4	★			
		16T308-CQ	3(2.5)2-CQ					0.8	★			
	TCMW	110204	2(1.5)1	11	6.35	2.38	2.8	0.4	★			
		110304	221			3.18		0.4	★			
		16T304	3(2.5)1	16.5	9.525	3.97	4.4	0.4	★			
		16T308	3(2.5)2					0.8	★			

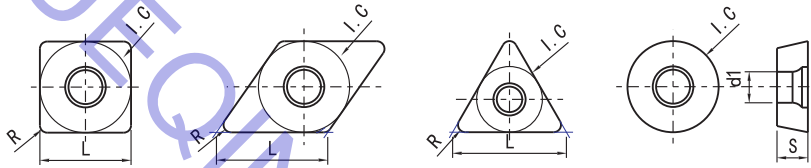


Illustration	Type		Dimension (mm)					Recommended grade		刀杆推荐
	(ISO)	(inch)	L	Φ I.C	S	Φ d _i	R	ZPC101		
	VBMT	160404-CQ	331-CQ	16.6	9.525	4.76	4.4	0.4	★	
		160408-CQ	332-CQ					0.8	★	
	VBMW	160404	331	16.6	9.525	4.76	4.4	0.4	★	
	RCMT	0803MO-U			8	3.18	3.4		★	
		10T3MO-U			10	3.97	4.4		★	
		1204MO-U			12	4.76	4.4		★	

★ the 1st choice ☆ the 2nd choice

